

noitiear enweit eten

CITY OF ROCKWALL, ROCKWALL COUNTY, TEXAS

<u>INDEX</u>	
ITEM	SHEET
PLAT.	1-2
PAVING DRAINAGE	3
UTILITIES	Cy 0
LOT GRADING	, Q

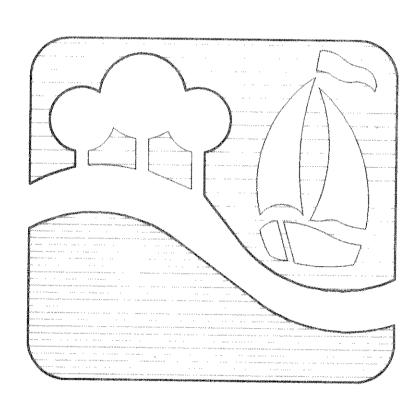

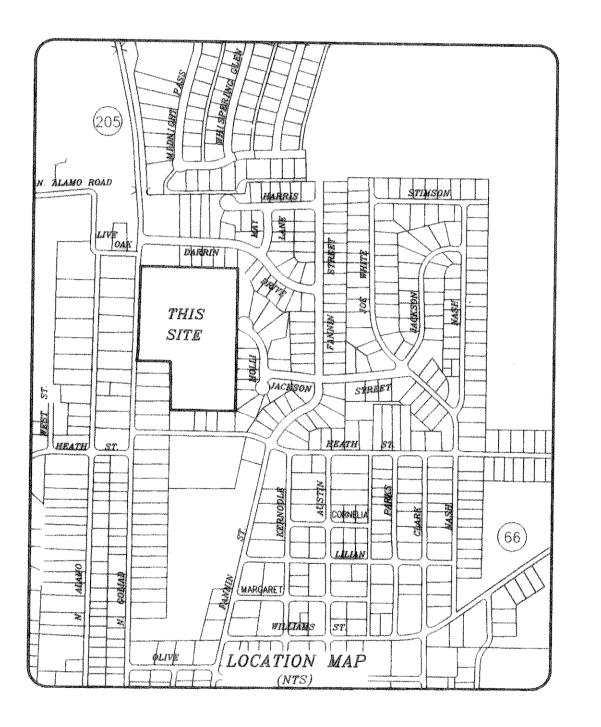

OWNER :

MIKE HOGUE

3666 COUNTY RD. 2526

ROYCE CITY, TEXAS 75189 (972) 771-2193

GENERAL NOTES


- 1. EXCAVATED MATERIAL SHALL BE PLACED AS DIRECTED BY THE OWNER.
- 2. ALL FILL AREAS IN STREET RIGHT OF WAYS TO BE DENSITY CONTROLLED AND COMPACTED TO 95% DENSITY AT OPTIMUM MOISTURE CONTENT.
- 3. NO TREES SHALL BE CUT EXCEPT ON THE SPECIFIC AUTHORITY OF THE ENGINEER.
- FOR CONSTRUCTION " , CITY OF ROCKWALL
- 5. PAVEMENT THICKNESS SHALL BE AS FOLLOWS;

RESIDENTIAL STREETS MINOR COLLECTOR STREET

- = 6" THICK , 3500 P.S.I. CONCRETE
- MAJOR COLLECTOR & ARTERIAL STREETS = 8" THICK , 3500 P.S.I. CONCRETE
- = 6" THICK, 3500 P.S.I. CONCRETE
- 6. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO LOCATE AND VERIFY ALL EXISTING UTILITIES PRIOR TO THE BEGINNING OF CONSTRUCTION TO INSURE NO CONFLICT BETWEEN ALL UTILITY LINES.
- 7. WHERE WATER PIPELINES EITHER CROSS OR OTHERWISE COME WITHIN 9 FEET OF A SANITARY SEWER PIPELINE THE SEWER PIPELINE SHALL BE EITHER CAST IRON OR PVC PIPE WITH A MINIMUM WORKING PRESSURE CLASS OF 150 PSI.
- 8. ALL WATER SERVICES TO BE 1" INSTALLED TO THE CENTER OF EACH LOT WITH SEWER LATERALS 10' DOWNSTREAM. WATER SERVICES SHALL BE PE 200 PSI SDR 9 WITH METAL INSERTS.
- 9. CONDUITS FOR S. W. BELL AND NORTH TEXAS CABLE COMM T.V. SHALL HAVE 30" OF COVER AND SHALL EXTEND 2 FEET BEYOND FUTURE PAVING.
- 10. ALL FITTINGS SHALL BE BRASS COMPRESSION.
- 11. RESILIENT SEATED GATE VALVES ONLY WILL BE ALLOWED.
- 12. BLUE MARKER E. M. S. #1252 SHALL BE PLACED UNDER EACH CORPORATION STOP
- 13. GREEN MARKER E. M. S. #1253 SHALL BE PLACED UNDER EACH SEWER SERVICE AND AT EACH MANHOLE AT A DEPTH NOT TO EXCEED 5 FEET.

T.U. ELECTRIC COMPANY GENERAL NOTES

- 1, CONTRACTOR TO INSTALL ALL CONDUIT AS SHOWN ON PRINT.
- 2. T.U. ELECTRIC COMPANY TO FURNISH CONDUIT AND CABLE MARKERS.
- 3. DEVELOPER TO INSTALL 1 (ONE) CABLE MARKER AT EACH END OF CONDUIT.
- 4. EACH CONDUIT MUST BE BURIED A MINIMUM OF 40" DEEP (AFTER LAND IS BROUGHT TO FINAL GRADE AND EXTEND 2 FEET BEYOND FUTURE PAVING).
- 5. EACH CONDUIT MUST BE INSPECTED BY THE DISTRIBUTION DEPARTMENT BEFORE BACKFILLING IN TRENCH. ROBERT GAYLOR 487-2351.
- 6. EACH CONDUIT MUST HAVE A PULL WIRE INSTALLED AND BE CAPPED AT BOTH ENDS.



HAROLD L. EVANS, CONSULTING ENGINEER

P.O. BOX 28355

DALLAS, TEXAS 75228 (214) 328-8133