

LEGEND

PROPERTY LINE -W--- EXISTING WATER LANE — WATER WATER LINE ____s <u>for s.s.</u> s _____ s ____ EX.SANITARY SEWER LINE PROP. 8" S.S. S PROP. SANITARY SEWER LINE PROPOSED STORM SEWER

PROPOSED FIRE HYDRANT ∞F.D.C. PROPOSED FIRE CONNECTION PROPOSED WATER METERS PROPOSED BACK FLOW PREVENTER

P.S.&V.E.

S.S.E.

-**⊹**- FH Τ_{W. ∨.}

D.E.

VISIBILITY EASEMENT UTILITY EASEMENT

> SANITARY SEWER EASEMENT DRAINAGE EASEMENT FIRE LANE, PUBLIC ACCESS

PEDESTERIAN SIGNT &

F.A.W.E. & WATER EASEMENT V.E. VISIBILITY EASEMENT

PROPOSED FIRE LANE B.S. FRONT SET BACK LANDSCAPE SET BACK

> EXISTING STORM SEWER EXISTING PAVEMENT/CURB

BARRIER FREE RAMP

EXISTING SEWER MANHOLE PROPOSED HANDICAP PARKING SPACE

EXISTING POWER POLE EXISTING STORM INLETS EXISTING FIRE HYDRANT EXISTING WATER VALVE

PROPOSED BOLLARDS PROPOSED CAR STACKING PROP.6' HIGH WROUGHT IRON FENCE EXISTING TREE

TRANSFORMER FIRE LANE, PUBLIC ACCESS & F.A.U.E. UTILITY EASEMENT 0 0 GREASE TRAP

PROPOSED HANDICAP SIGN

SAMPLING WELL SINGLE CLEAN OUT • C.O. ∞ C.O. DOUBLE CLEAN OUT MONUMENT/POLE SIGN PROPOSED WHEEL STOP

GENERAL NOTES

1. ALL CONSTRUCTION SHALL BE IN STRICT ACCORDANCE WITH THE STANDARDS OF THE CITY OF ROCKWALL.

2. A PERMIT IS REQUIRED TO CUT A CITY STREET OR WORK WITHIN THE RIGHT-OF-WAY. THE PERMIT IS ISSUED BY THE PUBLIC WORKS DEPARTMENT.

3. THE LOCATION OF UNDERGROUND UTILITIES INDICATED ON THE PLANS IS TAKEN FROM PUBLIC RECORDS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO MAKE ARRANGEMENTS WITH THE OWNERS OF SUCH UNDERGROUND UTILITIES PRIOR TO WORKING IN THE AREA TO CONFIRM THEIR EXACT LOCATION AND TO DETERMINE WHETHER ANY ADDITIONAL UTILITIES OTHER THAN THOSE SHOWN ON THE PLANS MAY BE PRESENT. THE CONTRACTOR SHALL PRESERVE AND PROTECT ALL UNDERGROUND UTILITIES. IF EXISTING UNDERGROUND UTILITIES ARE DAMAGED, THE CONTRACTOR WILL BE RESPONSIBLE FOR THE COST OF REPAIRING THE

4. WHERE EXISTING UTILITIES OR SERVICE LINES ARE CUT, BROKEN OR DAMAGED, THE CONTRACTOR SHALL REPLACE OR REPAIR THE UTILITIES OR SERVICE LINES WITH THE SAME TYPE OF ORIGINAL MATERIAL AND CONSTRUCTION, OR BETTER, UNLESS OTHERWISE SHOWN OR NOTED ON THE PLANS, AT HIS OWN COST AND EXPENSE. THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER AT ONCE OF ANY CONFLICTS IN GRADES AND ALIGNMENT.

5. ALL EXCAVATIONS, TRENCHING AND SHORING OPERATIONS SHALL COMPLY WITH THE REQUIREMENTS OF THE U. S. DEPARTMENT OF LABOR, OSHA, "CONST. SAFETY AND HEALTH REGULATIONS.", VOL. 29, SUBPART P. PG. 128 -137, AND ANY AMENDMENTS THERETO.


6. ADEQUATE MEASURES SHALL BE TAKEN TO PREVENT EROSION. IN THE EVENT THAT SIGNIFICANT EROSION OCCURS AS A RESULT OF CONSTRUCTION THE CONTRACTOR SHALL RESTORE THE ERODED AREA TO ORIGINAL CONDITION OR BETTER.

7. THE CONTRACTOR SHALL RESTORE ALL AREAS DISTURBED BY CONSTRUCTION TO ORIGINAL CONDITION OR BETTER. RESTORED AREAS INCLUDE, BUT ARE NOT LIMITED TO TRENCH BACKFILL, SIDE SLOPES, FENCES, CULVERT PIPES, DRAINAGE DITCHES, DRIVEWAYS, PRIVATE YARDS AND ROADWAYS.

8. ANY CHANGES NEEDED AFTER CONSTRUCTION PLANS HAVE BEEN RELEASED, SHALL BE APPROVED BY THE CITY ENGINEER. THESE CHANGES MUST BE RECEIVED IN WRITING FROM THE FROM THE DESIGN ENGINEER. THE DIRECTOR OF PUBLIC WORKS SHALL APPROVE ANY DEVIATIONS FROM STATE REGULATIONS.

9. THE CONTRACTOR SHALL PROVIDE "RED LINED" MARKED PRINTS TO THE ENGINEER PRIOR TO FINAL INSPECTION INDICATING ALL CONSTRUCTION WHICH DEVIATED FROM THE PLANS OR WAS CONSTRUCTED IN ADDITION TO THAT INDICATED ON THE PLANS.

BOUNDARY LINE DATA					
LINE NO.	BEARING	DISTANCE			
L1	S 78°34'14" W	102.41'			
L2	N 11°25'13" W	201.02'			
L3	N 01°10'03" W	31.12'			
L4	N 58°45'59" W	50.79'			
L5	S 89°38'31" E	471.62'			
L6	S 13°21'59" W	186.68'			
L7	S 44°51'38" W	145.74'			
L8	S 43°32'33" E	88.95'			
L9	S 56°56'31" E	43.84'			

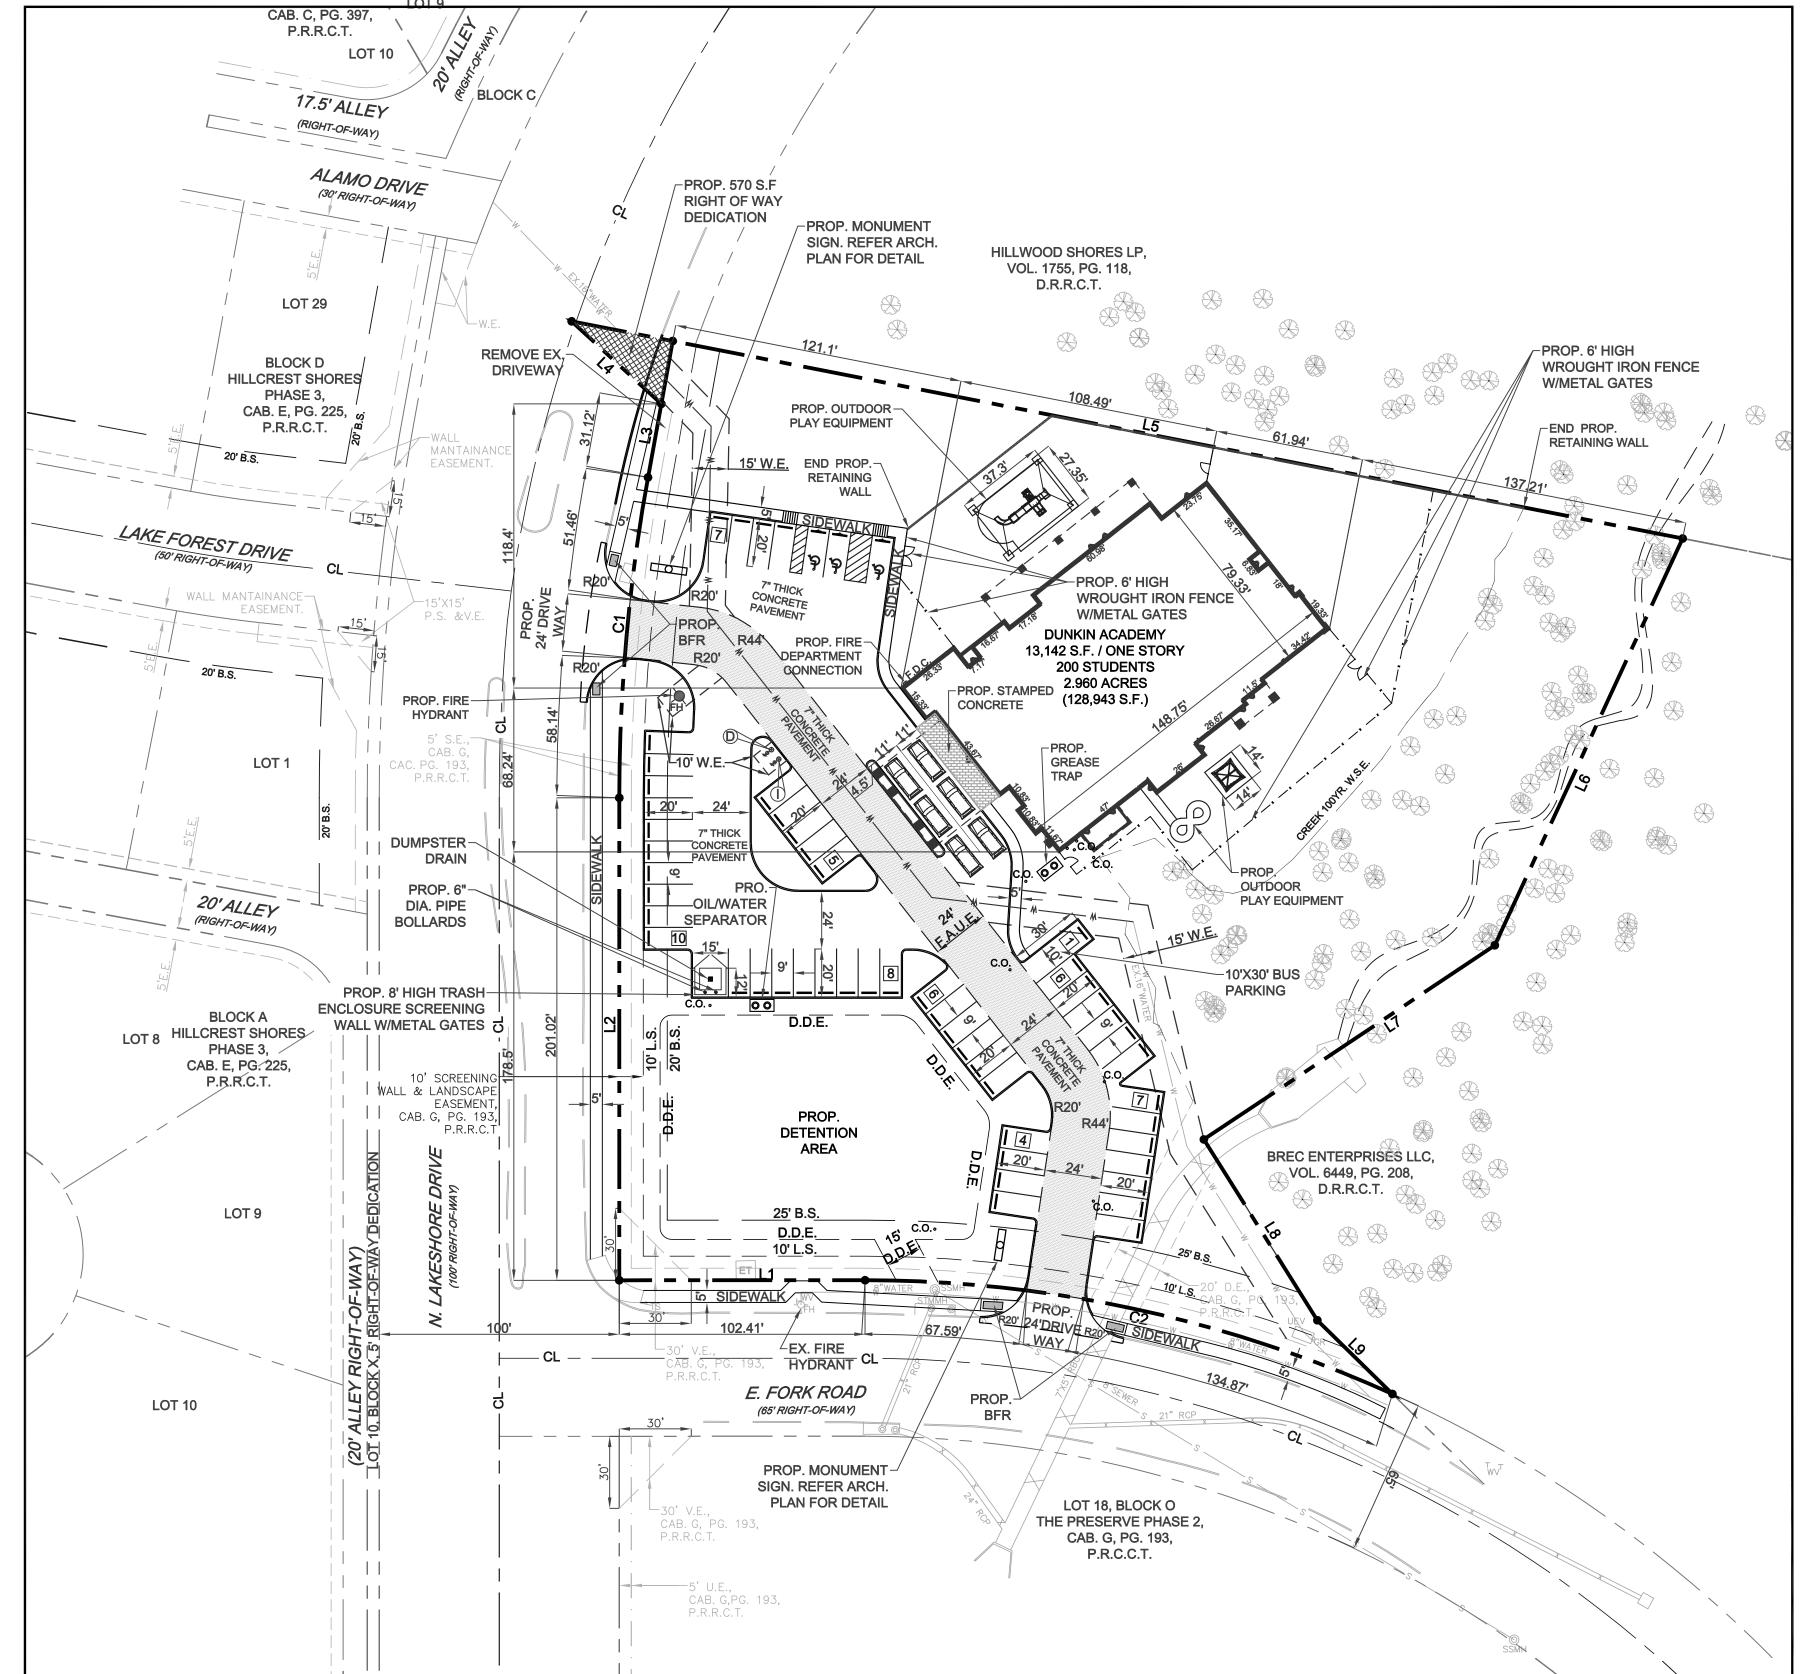

LEGEND	
UTILITY EASEMENT	U.E.
SANITARY SEWER EASEMNET	S.S.E.
DRAINAGE EASEMENT	D.E.
WATERLINE EASEMENT	W.E.
VISIBILITY EASEMENT	V.E.
SIDEWALK EASEMENT	S.E.
ELECTRICAL EASEMENT	E.E.
CLEAN OUT	C.O.
GAS METER	GM
ELECTRICAL VAULT	EV
LIGHT POLE	LP
TRAFFIC SIGN	TS
ELECTRICAL TRANSFORMER	ET
FIRE HYDRANT	FH
SANITARY SEWER MANHOLE	SSMH
STORM SEWER MANHOLE	STMMH
BUILDING SET BACK	B.S.
LANDSCAPE BUFFER	L.B.
PRESSURE REDUCING VALVE	PRV
FIRE DEPARTMENT CONNECTION	F.D.C.
PEDESTERIAN SIGHT & VISIBILITYESAEMENT	P.S.&V.E.
BARRIER FREE RAMP	BFR

SITE DATA SU	MMARY TA	BLE			
PHYSICAL ADDRESS	TO BE DETE	RMINED			
GROSS SITE AREA	2.960 ACRES	(128,943 S.F.)			
NET AREA	2.960 ACRES	(128,943 S.F.)			
ZONING	PD-41				
CURRENT USE	VACANT				
PROPOSED USE	DAYCARE				
LOT COVERAGE DATA					
BUILDING COVERAGE	13,142 S.F. (10.19%)				
IMPERVIOUS COVERAGE	82,111 S.F. (63.68%)				
PERVIOUS COVERAGE	46,832 S.F. (30	6.32%)			
PARKING SUMMERY					
PARKING REQUIREMENT	REQUIRED	PROVIDED			
1 SPACE PER 300 GFA	44	54			
TOTAL PARKING	44	54			
BUILDI	NG DATA				
BUILDING	1				
PEAK HEIGHT	29'-0"				
TOTAL SQUARE FOOTAGE	13,142 S.F.				

DETENTION NOTE

1. ONSITE DETENTION WILL BE PROVIDED.

WATER METER & SANITARY SEWER SCHEDULE					
ID	TYPE	SIZE	NO.	SAN. SEW.	
D	DOM.	2"	1	6"	
	IRR.	1"	1	N/A	

CASE # SP2017-.....

REDESIGNED SITE PLAN **DUNKIN ACADEMY** NEC OF N. LAKESHORE DRIVE & E. FORK ROAD CITY OF ROCKWALL ROCKWALL COUNTY, TEXAS



T: 214.609.92711 F: 469.359.6709 | E: kpatel@triangle-engr.com W: triangle-engr.com | O: 1333 McDermott Drive, Suite 200, Allen, TX 75013

"White	Plann	ing	Civil Engir	neering	Construction I	Vanagement
	DESIGN	DRAWN	DATE	SCALE	PROJECT NO.	SHEET NO.
	KP	Ç				
		S				

KARTAVYA S. PATEL

97534

	CURVE DATA TABLE					
NO. LENGTH RADIUS DELTA CH BEARING CH LENGT				CH LENGTH		
C1	134.21'	750.00'	10°15'10"	N 06°17'38" W	134.03'	
C2	226.46'	532.50'	24°21'59"	N 89°14'47" W	224.76	

OWNER/DEVELOPER					
DUNKIN ACADEMY ROCKWALL LLC					
320 N TOWN EAST BLVD					
SUNNYVALE, TEXAS 75182					
CONTACT: JOHN DUNKIN					
TEL: (469) 358-5590					

DESCRIPTION

REDESIGNED SITE PLAN SUBMITTAL

1st ENGINEERING SUBMITTAL

1st CITY SUBMITTAL

2nd CITY SUBMITTAL

10. DATE

09/16/16


10/04/16

11/09/16

4 | 04/14/17

DUNKIN ACADEMY SITE DEVELOPMENT

2.960 ACRES OF LAND BEING A REPLAT OF LOT 1, BLOCK S OF THE PRESERVE PHASE 3, AN ADDITION TO THE

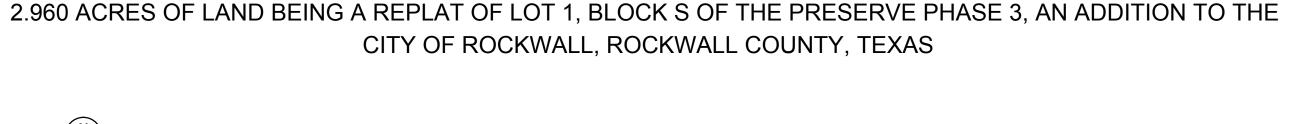

SOLID SOD BERMUDA

GRAY WOOD ARCHITECTS


ARLINGON, TEXAS 76017

CONTACT:GRAY WOOD

TEL: (817) 975-9767

4606 PARK SPRINGS BLVD. SUITE 11

GRASS TYPICAL FOR ALL TURF AREAS

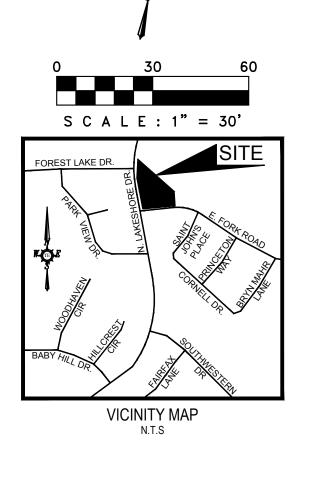

MANTAINANCE

15' VISIBILITY

TURF AREAS

15' VISIBILITY TRIANGLE-

P.S. &V.E. SOLID SOD BERMUDA GRASS TYPICAL FOR ALL

INE NO.

BEARING

N 78°34'14" W

N 01°10'03" W

N 58°45'59" W

S 13°21'59" W

S 44°51'38" W

S 43°32'33" E

L2 N 11°25'13" W

L5 | S 89°38'31" E

L9 S 56°56'31" E

DISTANCE

102.41'

201.02'

31.12'

50.79'

471.62'

186.68'

145.74'

88.95'

43.84'

EASEMENT.

WATER METER & SANITARY SEWER SCHEDULE					
ID	TYPE	SIZE	NO.	SAN. SEW.	
	DOM.	1"	1	6"	
				·	

LANDSCAPE TABULATIONS:

SITE REQUIREMENTS (site area 128,943 s.f.) Requirements: 10% site area to be landscaped

Required Provided 48,881 s.f. 19,341 s.f. (15%)

FRONT YARD REQUIREMENTS

Requirements: 50% of required landscape must be located in front yard

9,670s.f. (50%) 17,888 s.f.

STREET REQUIREMENTS Requirements: (1) tree 3" cal. per 50 l.f. of frontage

N LAKESHORE DRIVE (366.35 L.F.)

Required

(8) trees (8) trees

E FORK ROAD (328.97 l.f.)

Required Provided

PARKING LOT (53 spaces) Requirements: (1) tree, 3" cal. per 20 parking spaces

(7) trees


(3) trees, 3" cal. (4) trees, 3" cal.

TREE MITIGATION-

(7) trees

(44) 5" caliper trees (4) 3" caliper trees

are proposed to be credited to mitigation required. Refer to sheet L.1 for existing tree plan

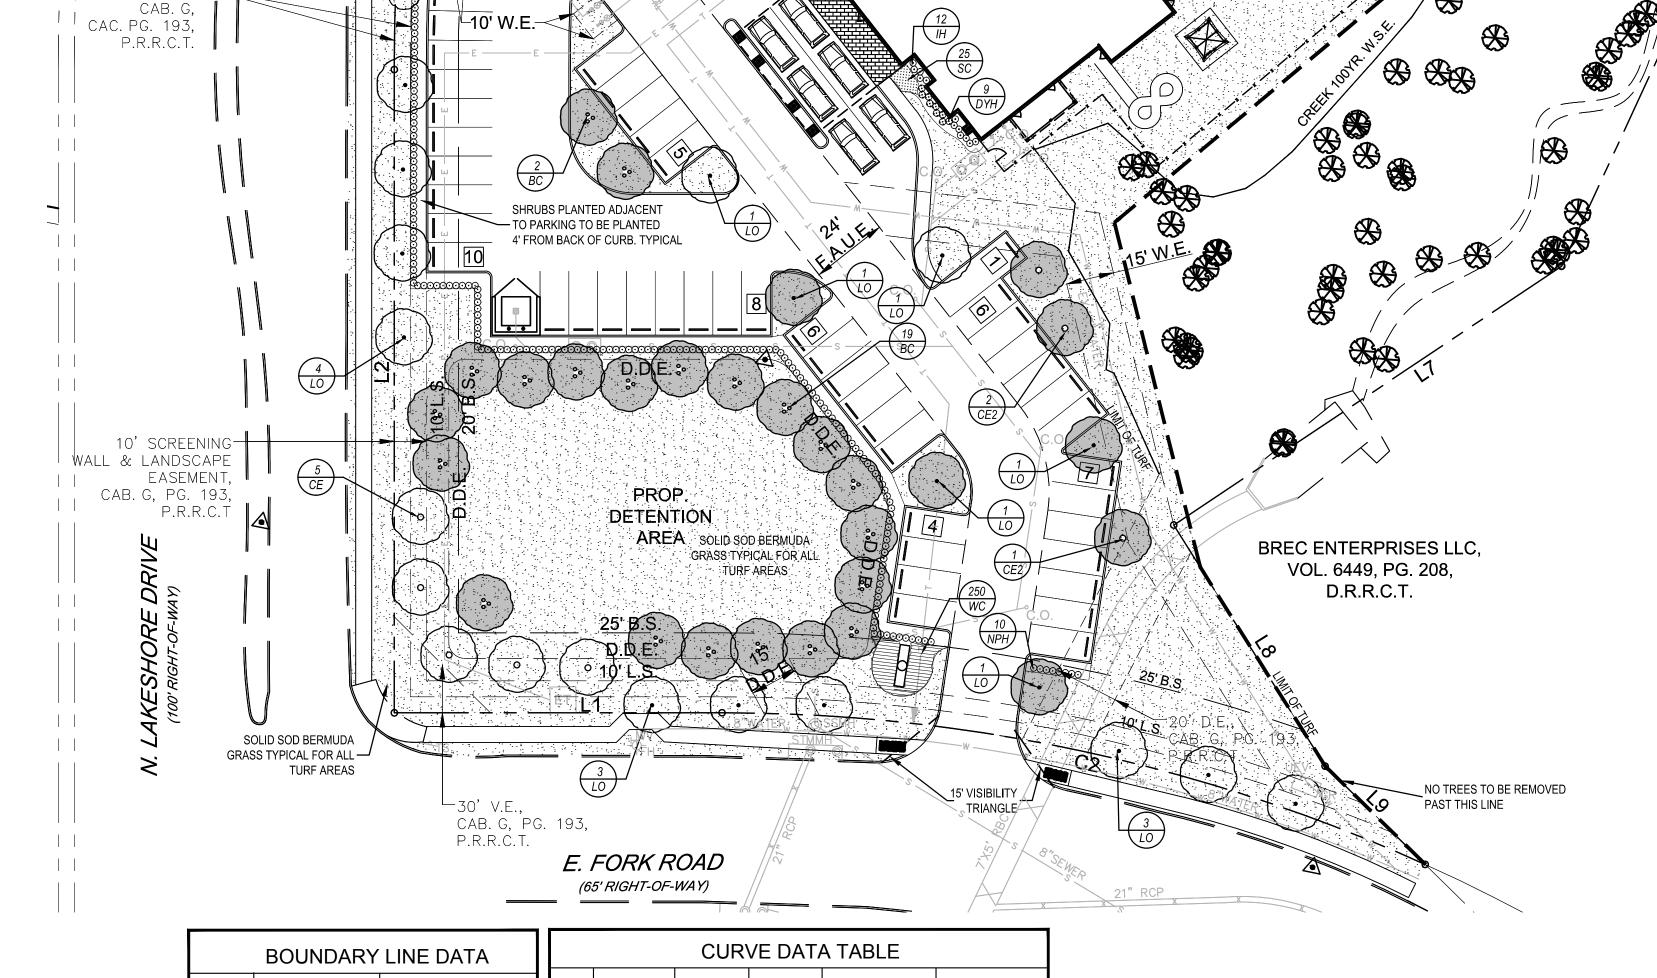

NO. | LENGTH | RADIUS | DELTA | CH BEARING | CH LENGTH

226.46' | 532.50' | 24°21'59" | N 89°14'47" W |

COOPER GENERAL CONTRACTORS

2560 TECHNOLOGY DRIVE SUITE 100

PLANO, TEXAS 75074

CONTACT:DOUG GALLOWAY

TEL: (469) 249-9279

750.00' | 10°15'10" | N 06°17'38" W

224.76

A&W SURVEYORS INC.

P.O. BOX 870029

MESQUITE, TEXAS 75157

CONTACT:JOHN TURNER,R.P.L.S

TEL: (972) 881-4975

TRIANGLE ENGINEERING LLC

1333 McDERMOTT ROAD STE 200

ALLEN, TEXAS 75013

CONTACT:KARTAVYA PATEL

TEL: (214) 609-9271

GENERAL LAWN NOTES

- FINE GRADE AREAS TO ACHIEVE FINAL CONTOURS INDICATED ON CIVIL
- ADJUST CONTOURS TO ACHIEVE POSITIVE DRAINAGE AWAY FROM BUILDINGS. PROVIDE UNIFORM ROUNDING AT TOP AND BOTTOM OF SLOPES AND OTHER BREAKS IN GRADE. CORRECT IRREGULARITIES AND AREAS WHERE WATER MAY STAND.
- 3. ALL LAWN AREAS TO RECEIVE SOLID SOD SHALL BE LEFT IN A MAXIMUM OF 1" BELOW FINAL FINISH GRADE. CONTRACTOR TO COORDINATE OPERATIONS WITH ON-SITE CONSTRUCTION MANAGER.
- IMPORTED TOPSOIL SHALL BE NATURAL, FRIABLE SOIL FROM THE REGION, KNOWN AS BOTTOM AND SOIL, FREE FROM LUMPS, CLAY, TOXIC SUBSTANCES, ROOTS, DEBRIS, VEGETATION, STONES, CONTAINING NO SALT AND BLACK TO BROWN IN COLOR.
- ALL LAWN AREAS TO BE FINE GRADED, IRRIGATION TRENCHES COMPLETELY SETTLED, AND FINISH GRADE APPROVED BY THE OWNER'S CONSTRUCTION MANAGER OR ARCHITECT PRIOR TO INSTALLATION.
- ALL ROCKS 3/4" DIAMETER AND LARGER, DIRT CLODS, STICKS, CONCRETE SPOILS, ETC. SHALL BE REMOVED PRIOR TO PLACING TOPSOIL AND ANY LAWN INSTALLATION
- CONTRACTOR SHALL PROVIDE (1") ONE INCH OF IMPORTED TOPSOIL ON ALL AREAS TO RECEIVE LAWN.

SOLID SOD NOTES

- FINE GRADE AREAS TO ACHIEVE FINAL CONTOURS INDICATED. LEAVE AREAS TO RECEIVE TOPSOIL 3" BELOW FINAL DESIRED GRADE IN PLANTING AREAS AND 1" BELOW FINAL GRADE IN TURF
- ADJUST CONTOURS TO ACHIEVE POSITIVE DRAINAGE AWAY FROM BUILDINGS. PROVIDE UNIFORM ROUNDING AT TOP AND BOTTOM OF SLOPES AND OTHER BREAKS IN GRADE. CORRECT IRREGULARITIES AND AREAS WHERE WATER MAY STAND.
- ALL LAWN AREAS TO RECEIVE SOLID SOD SHALL BE LEFT IN A MAXIMUM OF 1" BELOW FINAL FINISH GRADE. CONTRACTOR TO COORDINATE OPERATIONS WITH ON-SITE CONSTRUCTION
- CONTRACTOR TO COORDINATE WITH ON-SITE CONSTRUCTION MANAGER FOR AVAILABILITY OF EXISTING TOPSOIL.
- PLANT SOD BY HAND TO COVER INDICATED AREA COMPLETELY INSURE EDGES OF SOD ARE TOUCHING. TOP DRESS JOINTS BY HAND WITH TOPSOIL TO FILL VOIDS.
- 6. ROLL GRASS AREAS TO ACHIEVE A SMOOTH, EVEN SURFACE, FREE FROM UNNATURAL UNDULATIONS.
- 7. WATER SOD THOROUGHLY AS SOD OPERATION PROGRESSES.
- CONTRACTOR SHALL MAINTAIN ALL LAWN AREAS UNTIL FINAL ACCEPTANCE. THIS SHALL INCLUDE, BUT NOT LIMITED TO: MOWING, WATERING, WEEDING, CULTIVATING, CLEANING AND REPLACING DEAD OR BARE AREAS TO KEEP PLANTS IN A VIGOROUS, HEALTHY CONDITION.
- CONTRACTOR SHALL GUARANTEE ESTABLISHMENT OF AN ACCEPTABLE TURF AREA AND SHALL PROVIDE REPLACEMENT FROM LOCAL SUPPLY IF NECESSARY.
- 10. IF INSTALLATION OCCURS BETWEEN SEPTEMBER 1 AND MARCH 1. ALL SOD AREAS TO BE OVER-SEEDED WITH WINTER RYEGRASS, AT A RATE OF (4) POUNDS PER ONE THOUSAND (1000) SQUARE FEET.

LANDSCAPE NOTES

- 1. CONTRACTOR SHALL VERIFY ALL EXISTING AND PROPOSED SITE ELEMENTS AND NOTIFY ARCHITECT OF ANY DISCREPANCIES. SURVEY DATA OF EXISTING CONDITIONS WAS SUPPLIED BY OTHERS
- CONTRACTOR SHALL LOCATE ALL EXISTING UNDERGROUND UTILITIES AND NOTIFY ARCHITECT OF ANY CONFLICTS. CONTRACTOR SHALL EXERCISE CAUTION WHEN WORKING IN THE VICINITY OF UNDERGROUND UTILITIES.
- . CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL REQUIRED LANDSCAPE AND IRRIGATION PERMITS.
- 4. CONTRACTOR TO PROVIDE A MINIMUM 2% SLOPE AWAY FROM ALL
- 5. ALL PLANTING BEDS AND LAWN AREAS TO BE SEPARATED BY STEE EDGING. NO STEEL TO BE INSTALLED ADJACENT TO SIDEWALKS OR
- 6. ALL LANDSCAPE AREAS TO BE 100% IRRIGATED WITH AN UNDERGROUND AUTOMATIC IRRIGATION SYSTEM AND SHALL INCLUDE RAIN AND FREEZE SENSORS.
- 7. ALL LAWN AREAS TO BE SOLID SOD BERMUDAGRASS, UNLESS OTHERWISE NOTED ON THE DRAWINGS.

PLANT MATERIAL SCHEDULE

YPE	QTY	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
BC	21	Bald Cypress	Taxodium distichum	5" cal.	B&B, 16' ht., 7' spread min., 7' clear trunk
CE	9	Cedar Elm	Ulmus crassifolia	3" cal.	B&B, 13' ht., 5' spread min., 5' clear trunk
CE2	23	Cedar Elm	Ulmus crassifolia	5" cal.	B&B, 16' ht., 7' spread min., 7' clear trunk
CM	5	Crepe Myrtle	Lagerstroemia indica	6' ht.	container, 3-5 canes, tree form
LO	16	Live Oak	Quercus virginiana	3" cal.	container, 14' ht., 6' spread, 5' clear straight t
SHRUBS					
TYPE	QTY.	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
DYH	9	Dwarf Yaupon Holly	llex vomitoria 'nana'	3 gal.	ccontainer grown, 20" spread
ΙH	12	Indian Hawthorn 'Clara'	Rhaphiolepis indica 'clara'	3 gal.	container, 18" ht., 18" spread
NPH	216	Needlepoint Holly	llex cornuta "Needlepoint'	5 gal.	container, 24" ht., 20" spread
GROUNI	DCOVERS				
TYPE	QTY	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
SC	25	Seasonal Color		4" pots	container, selection by owner
WC	550	Purple Wintercreeper	Eunoymus fortunei 'Colortus'	4" pots	container, 3-15" runners, 12" o.c.
		'419' Bermudagrass	Cynodon dactylon '419'		Solid Sod refer to notes

material shall meet or exceed remarks as indicated. All trees to have straight trunks and be matching

within varieties.

SP-2016----



ALL TREES TO BE LOCATED A MINIMUM OF 5' FROM PUBLIC UTILITIES. ALL SHRUBS ADJACENT FROM HEAD IN PARKING SHALL BE PLANTED 4' FROM BACK OF CURB

IRRIGATION IS REQUIRED PER THE UDC

ATE	DESCRIPTION	BY	_∞ σσσ
4/03/17	CITY SUBMITTAL	KP	S LANE
		KP	S TF
			18¶ 3 €
			18 has be
			20
			V4V

NEC OF N. LAKESHORE DRIVE & E. FORK ROAD **CITY OF ROCKWALL** ROCKWALL COUNTY, TEXAS


LANDSCAPE PLAN

DUNKIN ACADEMY

T: 214.609.9271| F: 469.359.6709 | E: kpatel@triangle-engr.com W: triangle-engr.com | O: 1333 McDermott Drive, Suite 200, Allen, TX 75013

Planning | Civil Engineering | Construction Management

DESIGN	DRAWN	DATE	SCALE	PROJECT NO.	SHEET NO.
KP	DS	08/23/16	SEE SCALE BAR	028–16	1 7
TX PE FIRM #11525					L. ∠

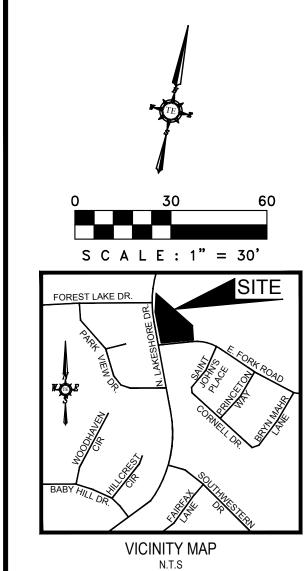

EXISTING TREE NOTES

- Existing trees to remain shall be protected during construction from tree structure damage and compaction of soil under and around dripline (canopy)
- . If any root structure is damaged during adjacent excavation/construction, notify the Architect immediately. It is recommended that a licensed Arborist be secured for the treatment of any possible tree wounds.
- No disturbance of the soil greater than 4" shall be located closer to the tree trunk than 1/2 the distance of the drip line to the tree trunk. A minimum of 75% of the drip line and root zone shall be preserved at natural grade.
- Any fine grading done within the critical root zones of the protected trees must be done with light machinery such as a bobcat or light tractor. No earth moving equipment with tracks is allowed within the critical root zone of the
- Material Storage: No materials intended for use in construction or waste materials accumulated due to excavation or demolition shall be placed within the limits of the dripline of any tre
- Equipment Cleaning/Liquid Disp solutions, or other liquid chemidripline of a tree. This would in asphalt, concrete, mortar, prime
- 7. Tree Attachments: No signs, w a protective nature shall be atta
- allowed within the limits of the o 9. Boring of Utilities: May be peri circumstances. The minimum
- tree's canopy and shall be a mi 10. Trenching: Any irrigation trench
- zone of a tree shall be dug by I 11. Tree Flagging: All trees to be r Contractor with bright red vinyl at a height of four (4') feet abov Landscape Architect prior to an
- 12. Protective Fencing: All trees to protective fencing located at the tree's dripline. The protective fencing may be 226 comprised of snow fencing, orange vinyl construction fencing, chain link fence or other similar fencing with a four (4') foot approximate height. The protective fencing will be located as indicated on the Tree Protection Detail(s).
- 13. Bark Protection: In situations where a tree remains in the immediate area of intended construction, the tree shall be protected by enclosing the entire circumference of the tree's trunk with lumber encircled with wire or other means that does not damage the tree. Refer to Tree Protection Detail(s).
- 14. Construction Pruning: In a case where a low hanging limb is broken during the course of construction, the Contractor shall notify the Landscape Architect immediately. In no instance shall the Contractor prune any portion of the damaged tree without the prior approval by the Landscape Architect.

	BOUNDARY LINE DATA					
LINE NO.	BEARING	DISTANCE				
L1	N 78°34'14" W	102.41'				
L2	N 11°25'13" W	201.02'				
L3	N 01°10'03" W	31.12'				
L4	N 58°45'59" W	50.79'				
L5	S 89°38'31" E	471.62'				
L6	S 13°21'59" W	186.68'				
L7	S 44°51'38" W	145.74'				
L8	S 43°32'33" E	88.95'				
L9	S 56°56'31" E	43.84'				

TREE SURVEY FIELD DATA

NO.	DIA.	SPECIES	REMARKS	MITIGATION	NO.	DIA.	SPECIES	REMARKS	MITIGATION
	INCHES	(COMMON NAME)		REQUIRED		INCHES	(COMMON NAME)		REQUIRED
101	8	CEDAR	TO BE REMOVED		151	6	CEDAR	TO BE REMOVED	
102	8	CEDAR	TO BE REMOVED		152	7	CEDAR	TO BE REMOVED	
103	8	CEDAR	TO BE REMOVED		153	8	CEDAR	TO BE REMOVED	
104	13	CEDAR	PROTECTED- TO BE REMOVED	6.5	154	6	CEDAR	TO BE REMOVED	
105	7	CEDAR	TO BE REMOVED		155	6	CEDAR ELM	PROTECTED- TO BE REMOVED	
106	6	CEDAR	TO BE REMOVED		156	6	TEXAS ASH	PROTECTED- TO BE REMOVED	
107	6	CEDAR	TO BE REMOVED		157	6	TEXAS ASH	PROTECTED- TO BE REMOVED	
108	7	CEDAR CEDAR	TO BE REMOVED TO BE REMOVED		158	8 7	TEXAS ASH CEDAR ELM	PROTECTED- TO BE REMOVED	
109 110	6 7	CEDAR	TO BE REMOVED		159 160	6	CEDAR ELM	PROTECTED- TO BE REMOVED	l '
110	6	CEDAR	TO BE REMOVED		161	6	CEDAR ELM	PROTECTED- TO BE REMOVED PROTECTED- TO BE REMOVED	
112	6	CEDAR	TO BE REMOVED		162	12	CEDAR ELM	PROTECTED- TO BE REMOVED	l -
113	8	CEDAR	TO BE REMOVED		163	8	AMERICAN ELM	PROTECTED- TO BE REMOVED	
114	6	CEDAR	TO BE REMOVED		164	10	AMERICAN ELM	PROTECTED- TO BE REMOVED	
115	7	CEDAR	TO BE REMOVED		165	11	CEDAR	PROTECTED- TO BE REMOVED	
116	6	CEDAR	TO BE REMOVED		166	9	CEDAR	TO BE REMOVED] "."
117	12	CEDAR	PROTECTED- TO BE REMOVED	6	167	10	HACKBERRY	TO BE REMOVED	
118	10	CEDAR	TO BE REMOVED		168	31	AMERICAN ELM	PROTECTED- TO BE REMOVED	62
119	6	CEDAR ELM	TO BE REMOVED		169	6	CEDAR ELM	PROTECTED- TO BE REMOVED	
120	7	CEDAR	TO BE REMOVED		170	8	CEDAR ELM	PROTECTED- TO BE REMOVED	
121	6	HACKBERRY	TO BE REMOVED		171	13	CEDAR ELM	PROTECTED- TO BE REMOVED	
122	7	CEDAR	TO BE REMOVED		172	8	CEDAR ELM	PROTECTED- TO BE REMOVED	
123	8	CEDAR	TO BE REMOVED		173	13	CEDAR ELM	PROTECTED- TO BE REMOVED	13
124	8	CEDAR	TO BE REMOVED		174	8	HACKBERRY	TO REMAIN	
125	8	CEDAR	TO BE REMOVED		175	7	HACKBERRY	TO REMAIN	
126	8	CEDAR	TO BE REMOVED		176	8	HACKBERRY	TO BE REMOVED	
127	7	HACKBERRY	TO BE REMOVED		177	14	CEDAR ELM	PROTECTED- TO BE REMOVED	14
128	9	HACKBERRY	TO BE REMOVED		178	9	CEDAR ELM	TO REMAIN	١.,
129	8	CEDAR	TO BE REMOVED		179	14	CEDAR ELM	PROTECTED- TO BE REMOVED	14
130	9	CEDAR	TO BE REMOVED		180	8	HACKBERRY	TO REMAIN	
131	6	CEDAR	TO BE REMOVED		181	7	HACKBERRY	TO REMAIN	
132	8	DEAD	TO BE REMOVED		182	8	CEDAR ELM	TO REMAIN	
133	6	HACKBERRY	TO BE REMOVED		183	7	CEDAR ELM	TO REMAIN	
134	10	HACKBERRY HACKBERRY	TO BE REMOVED TO BE REMOVED		184	8	CEDAR ELM CEDAR ELM	TO REMAIN TO REMAIN	
135 136	9 10	HACKBERRY	TO BE REMOVED		185 186	9 6	CEDAR ELM	TO REMAIN	
137	6	HACKBERRY	TO BE REMOVED		187	7	CEDAR ELM	TO REMAIN	
138	7	CEDAR	TO BE REMOVED		188	7	CEDAR ELM	TO REMAIN	
139	8	CEDAR	TO BE REMOVED		189	8	HACKBERRY	TO REMAIN	
140	7	CEDAR	TO BE REMOVED		190	7	HACKBERRY	TO REMAIN	
141	10	HACKBERRY	TO BE REMOVED		191	7	HACKBERRY	TO REMAIN	
142	7	HACKBERRY	TO BE REMOVED		192	8	HACKBERRY	TO REMAIN	
143	8	CEDAR	TO BE REMOVED		193	6	HACKBERRY	TO REMAIN	
144	7	HACKBERRY	TO BE REMOVED		194	6	HACKBERRY	TO REMAIN	
145	6	CEDAR	TO BE REMOVED		195	9	HACKBERRY	TO REMAIN	
146	6	CEDAR	TO BE REMOVED		196	7	HACKBERRY	TO REMAIN	
147	6	CEDAR	TO BE REMOVED		197	13	AMERICAN ELM	TO REMAIN	
148	6	CEDAR	TO BE REMOVED		198	10	AMERICAN ELM	TO REMAIN	
149	6	CEDAR	TO BE REMOVED		199	12	AMERICAN ELM	TO REMAIN	
150	6	CEDAR	TO BE REMOVED		200	11	CEDAR ELM	TO REMAIN	
NO.	DIA.	SPECIES	REMARKS	MITIGATION	NO.	DIA.	SPECIES	REMARKS	MITIGATION
	INCHES	(COMMON NAME)		REQUIRED		INCHES	(COMMON NAME)		REQUIRED
		,					,		
201	7	CEDAR ELM	TO REMAIN		251	10	HACKBERRY	TO REMAIN	
201	8	CEDAR ELM	TO REMAIN		251	6	HACKBERRY	TO REMAIN	
202	7	CEDAR ELM	TO REMAIN		252	7	HACKBERRY	TO REMAIN	
203	8	WILLOW	TO REMAIN		254	10	HACKBERRY	TO BE REMOVED	
205	6	WILLOW	TO REMAIN		255	7	CEDAR	TO BE REMOVED	
206	16	AMERICAN ELM	TO REMAIN		256	6	CEDAR	TO BE REMOVED	
207	21	AMERICAN ELM	TO REMAIN		257	7	CEDAR	TO BE REMOVED	
208	12	AMERICAN ELM	TO REMAIN		258	9	CEDAR	TO BE REMOVED	
200	۱ ۵	AMERICAN ELM	TO REMAIN	1	250	10	CEDAR	TO BE REMOVED	I

	the limits of the dripline of any tree.		INCHES	(COMMON NAME)		REQUIRED		INCHES	(COMMON NAME)	
ô.	Equipment Cleaning/Liquid Disposal: No equipment may be cleaned, toxic solutions, or other liquid chemicals shall be deposited within the limits of the dripline of a tree. This would include but not be limited to paint, oil, solvents, asphalt, concrete, mortar, primers, etc.	201 202 203 204	7 8 7 8	CEDAR ELM CEDAR ELM CEDAR ELM WILLOW	TO REMAIN TO REMAIN TO REMAIN TO REMAIN TO REMAIN		251 252 253 254	10 6 7 10	HACKBERRY HACKBERRY HACKBERRY HACKBERRY	TO REMAIN TO REMAIN TO REMAIN TO BE REMOVED
7.	Tree Attachments: No signs, wires or other attachments, other than those of a protective nature shall be attached to any tree.	205 206 207	6 16 21	WILLOW AMERICAN ELM AMERICAN ELM	TO REMAIN TO REMAIN TO REMAIN		255 256 257	7 6 7	CEDAR CEDAR CEDAR	TO BE REMOVED TO BE REMOVED TO BE REMOVED
3.	Vehicular Traffic: No vehicular and construction equipment traffic or parking is allowed within the limits of the dripline of trees.	208 209 210	12 9 36	AMERICAN ELM AMERICAN ELM AMERICAN ELM	TO REMAIN TO REMAIN TO REMAIN		258 259 260	9 10 6	CEDAR CEDAR CEDAR	TO BE REMOVED TO BE REMOVED TO BE REMOVED
9.	Boring of Utilities: May be permitted under protected trees in certain circumstances. The minimum length of the bore shall be the width of the tree's canopy and shall be a minimum depth of forty-eight (48") inches.	211 212 213 214	24 6 11 6	AMERICAN ELM TEXAS ASH TEXAS ASH TEXAS ASH	TO REMAIN TO REMAIN TO REMAIN TO REMAIN		261 262 263	7 8 7 6	CEDAR CEDAR CEDAR CEDAR	TO BE REMOVED TO BE REMOVED TO BE REMOVED TO BE REMOVED
10.	Trenching: Any irrigation trenching which must be done within the critical root zone of a tree shall be dug by hand and enter the area in a radial manner.	214 215 216 217	12 7 14	AMERICAN ELM HACKBERRY AMERICAN ELM	TO REMAIN TO REMAIN TO REMAIN TO REMAIN		264 265 266 267	15 6 7	CEDAR CEDAR CEDAR CEDAR	PROTECTED- TO BE REMOVED TO BE REMOVED TO BE REMOVED TO BE REMOVED
1.	Tree Flagging: All trees to be removed from the site shall be flagged by the Contractor with bright red vinyl tape (3" width) wrapped around the main trunk at a height of four (4') feet above grade. Flagging shall be approved by	218 219 220 221	12 8 9 15	CEDAR ELM CEDAR ELM AMERICAN ELM AMERICAN ELM	TO REMAIN TO REMAIN TO REMAIN TO REMAIN		268 269 270 271	6 6 6	CEDAR CEDAR CEDAR CEDAR	TO BE REMOVED TO BE REMOVED TO BE REMOVED TO BE REMOVED
	Landscape Architect prior to any tree removal. Contractor shall contact Landscape Architect with 72 hour notice to schedule on-site meeting.	222 223	7 7 10	AMERICAN ELM AMERICAN ELM CEDAR ELM	TO REMAIN TO REMAIN TO REMAIN		272 273 274	6 6 6	CEDAR CEDAR CEDAR	TO BE REMOVED TO BE REMOVED TO BE REMOVED
2.	Protective Fencing: All trees to remain, as noted on drawings, shall have protective fencing located at the tree's dripline. The protective fencing may be comprised of snow fencing, orange vinyl construction fencing, chain link fence or other similar fencing with a four (4') foot approximate height. The protective	224 225 226 227	9 10 7	AMERICAN ELM CEDAR ELM AMERICAN ELM	TO REMAIN TO REMAIN TO REMAIN TO REMAIN		274 275 276 277	6 8 8	CEDAR CEDAR CEDAR CEDAR	TO BE REMOVED TO BE REMOVED TO BE REMOVED TO BE REMOVED

TO REMAIN

TO REMAIN TO REMAIN

TO REMAIN

TO REMAIN

TO REMAIN

TO REMAIN TO REMAIN

TO REMAIN

TO REMAIN

TO REMAIN

TO REMAIN

TO REMAIN

TO REMAIN

TO REMAIN

TO REMAIN

TO REMAIN

232 CALIPER INCHES OF TREES TO BE PLANTED ON SITE-REFER TO SHEET L.2 FOR PROPOSED TREE LOCATIONS

24 TREE CREDITS TO BE PAID TO THE CITY OF ROCKWALL TREE REFORESTATION FUND (24 X 125= \$3,000.00)

AMERICAN ELM

AMERICAN ELM

AMERICAN ELM

AMERICAN ELM

CEDAR ELM

CEDAR ELM

CEDAR ELM


HACKBERRY

CEDAR ELM

238

249

AMERICAN ELM

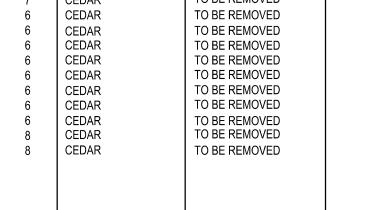

COOPER GENERAL CONTRACTORS

2560 TECHNOLOGY DRIVE SUITE 100

PLANO, TEXAS 75074

CONTACT:DOUG GALLOWAY

TEL: (469) 249-9279

PROTECTED- TO BE REMOVED 7 AMERICAN ELM TO REMAIN AMERICAN ELM PROTECTED- TO BE REMOVED 10 AMERICAN ELM TO REMAIN AMERICAN ELM TO REMAIN AMERICAN ELM TO REMAIN HACKBERRY 256 CALIPER INCHES OF TREES REQUIRED TO BE MITIGATED ON SITE.

> FENCING SHOWN ABOVE IS DIAGRAMMATIC ONLY AND WILL CONFORM TO THE DRIP LINE AND LIMITED TO PROJECT BOUNDARY (01) TREE PROTECTION FENCE A

104- PROTECTED

DETENTION

AREA

<u>D.D.E.</u>

E. FORK ROAD

ARCHITECT
GRAY WOOD ARCHITECTS

4606 PARK SPRINGS BLVD. SUITE 11

ARLINGON, TEXAS 76017

CONTACT:GRAY WOOD

TEL: (817) 975-9767

EXISTING TREE LEGEND

EXISTING TREES TO BE REMOVED

EXISTING TREES TO REMAIN

ENGINEER TRIANGLE ENGINEERING LLC 1333 McDERMOTT ROAD STE 200 ALLEN, TEXAS 75013 CONTACT:KARTAVYA PATEL TEL: (214) 609-9271	SURVEYOR A&W SURVEYORS INC. P.O. BOX 870029 MESQUITE, TEXAS 75157 CONTACT:JOHN TURNER,R.P.L. TEL: (972) 881-4975
---	--

TREE CANOPY

ANTAINANCE ASEMENT.

3. &V.E.

√B. G, 193, ₹.C.T.

리

ANDSCAPE ASEMENT, PG. 193,

P.R.R.C.T

7.5

DESCRIPTION NO. DATE 1 04/13/17 CITY SUBMITTAL

BREC ENTERPRISES LLC,

VOL. 6449, PG. 208,

D.R.R.C.T.

EXISTING TREE PLAN DUNKIN ACADEMY NEC OF N. LAKESHORE DRIVE & E. FORK ROAD CITY OF ROCKWALL ROCKWALL COUNTY, TEXAS


SP2017----




Planning | Civil Engineering | Construction Management


DESIGN DRAWN DATE SCALE PROJECT NO. SHEET NO. KP DS 08/23/16 SEE SCALE BAR 028-16 TX PE FIRM #11525


CURVE DATA TABLE NO. | LENGTH | RADIUS | DELTA | CH BEARING | CH LENGTH 134.21' | 750.00' | 10°15'10" | N 06°17'38" W C2 226.46' 532.50' 24°21'59" N 89°14'47" W 224.76

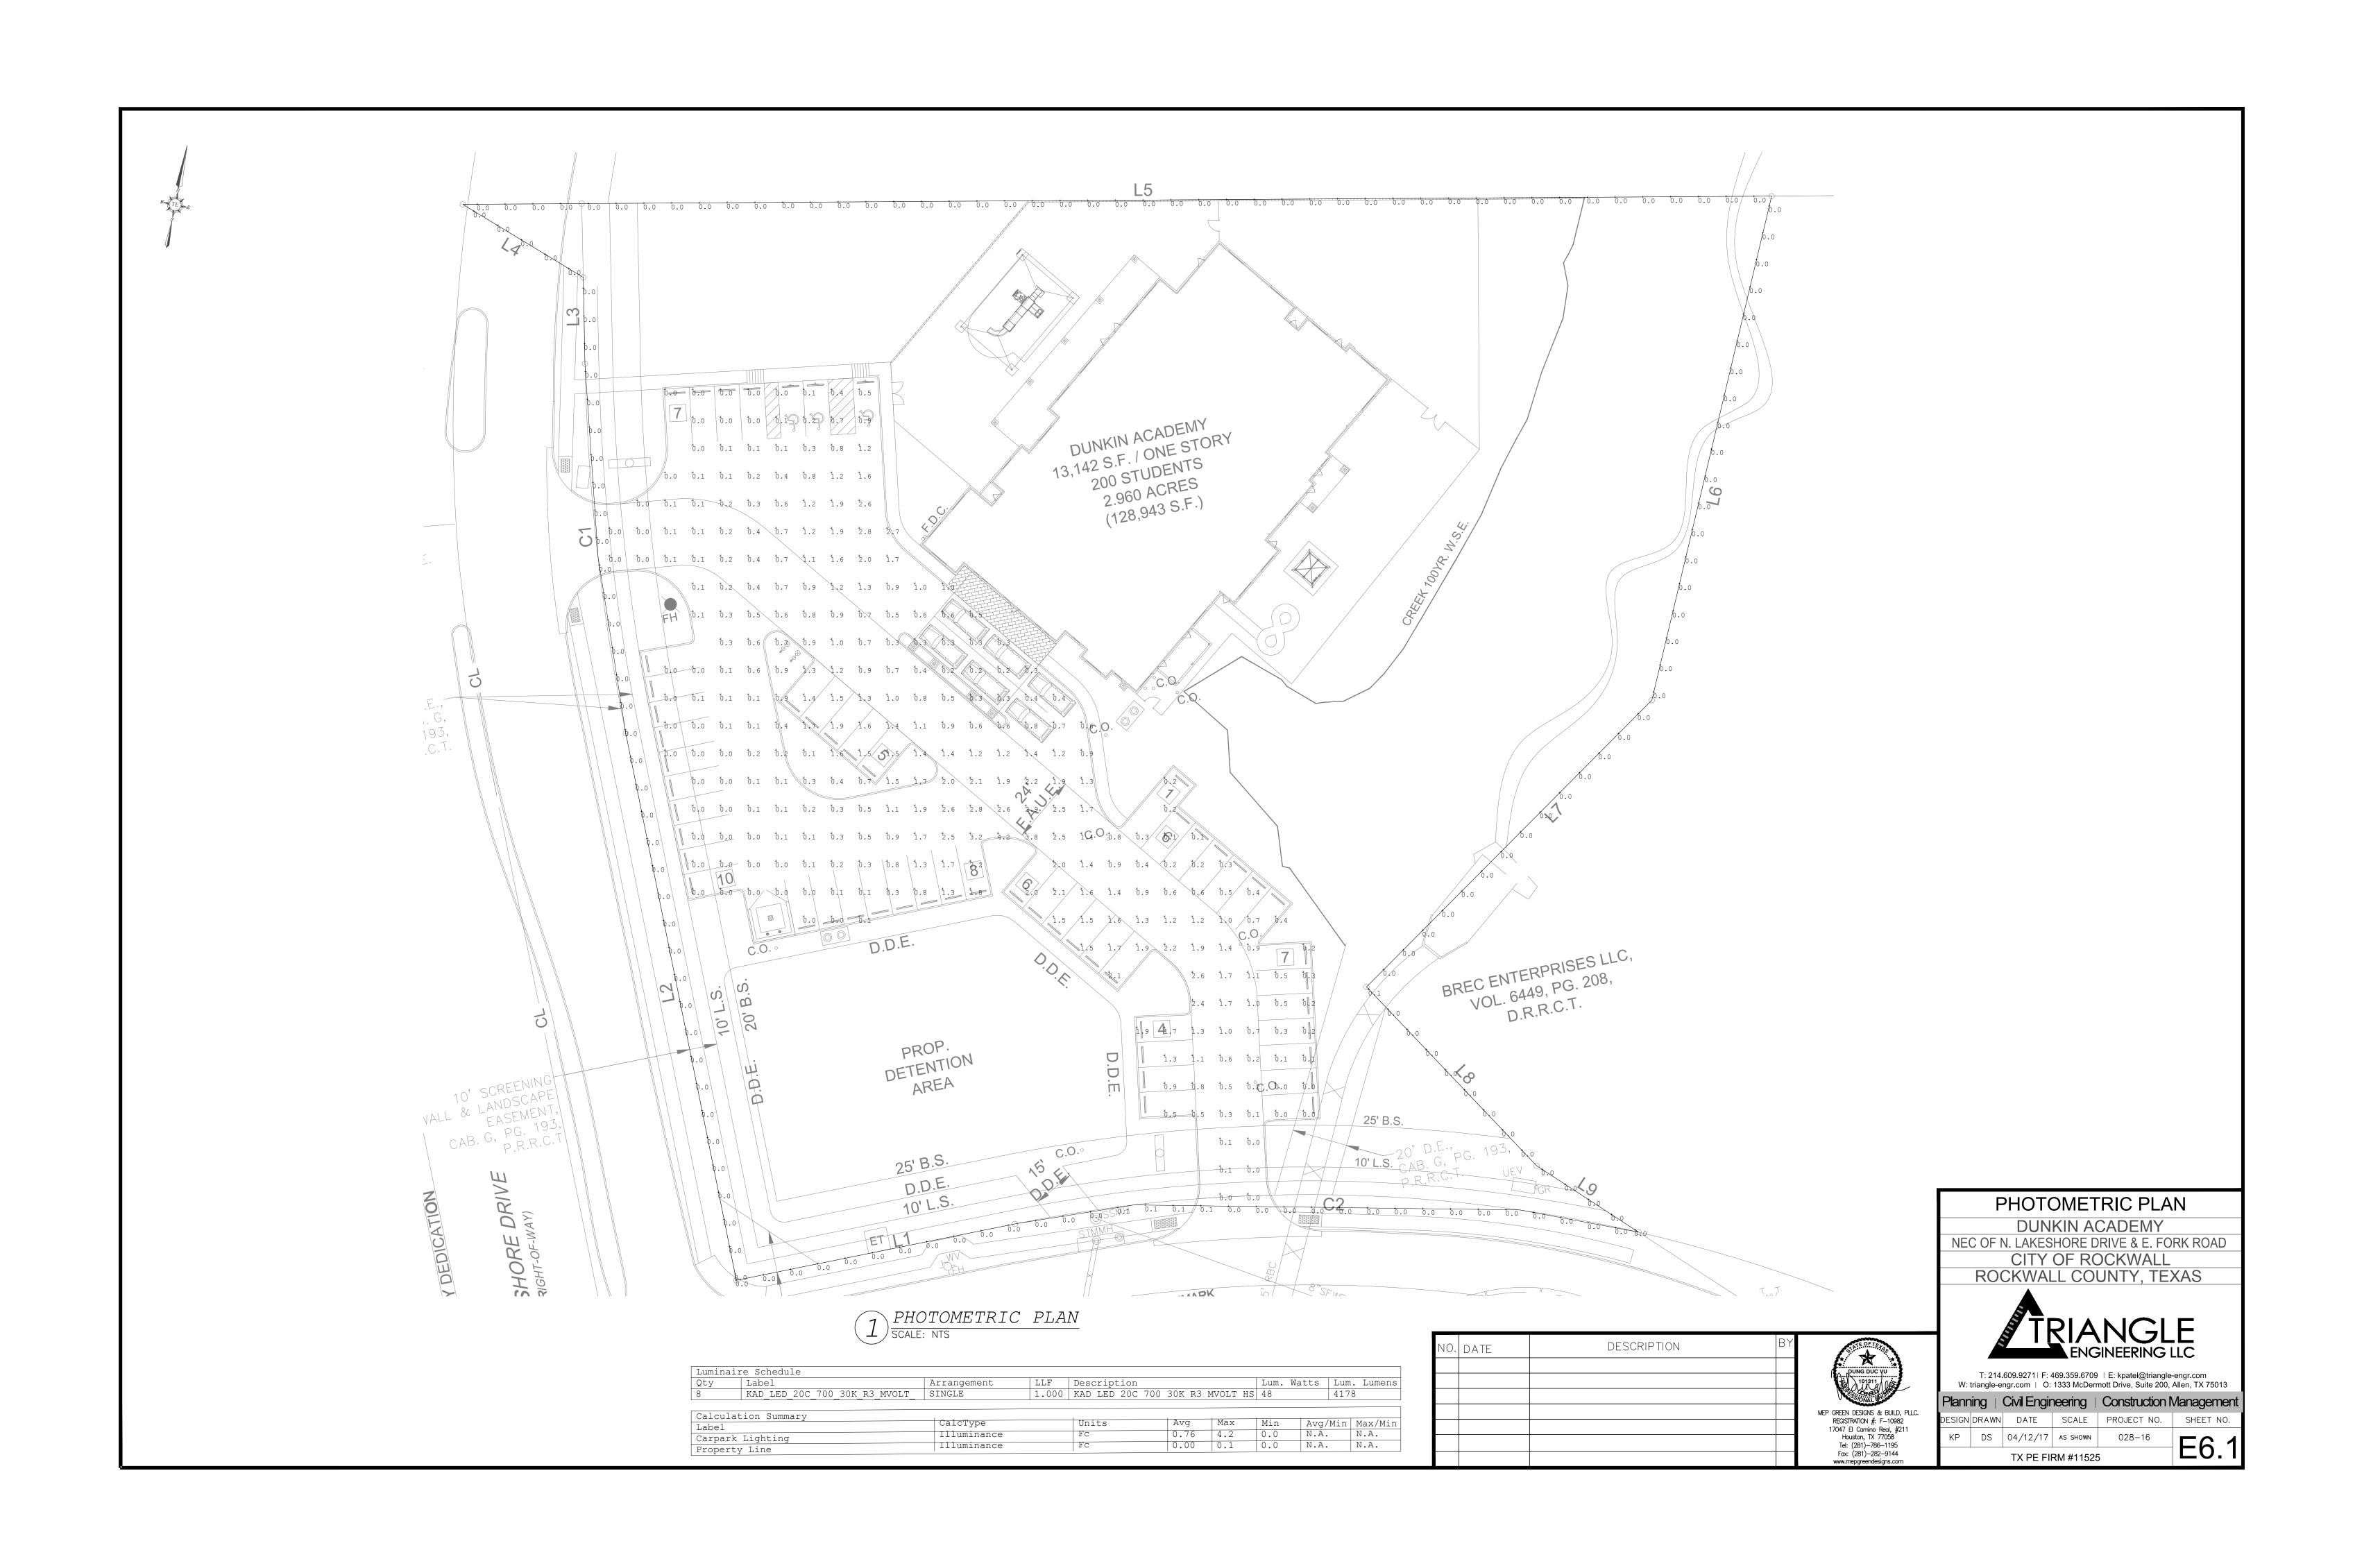


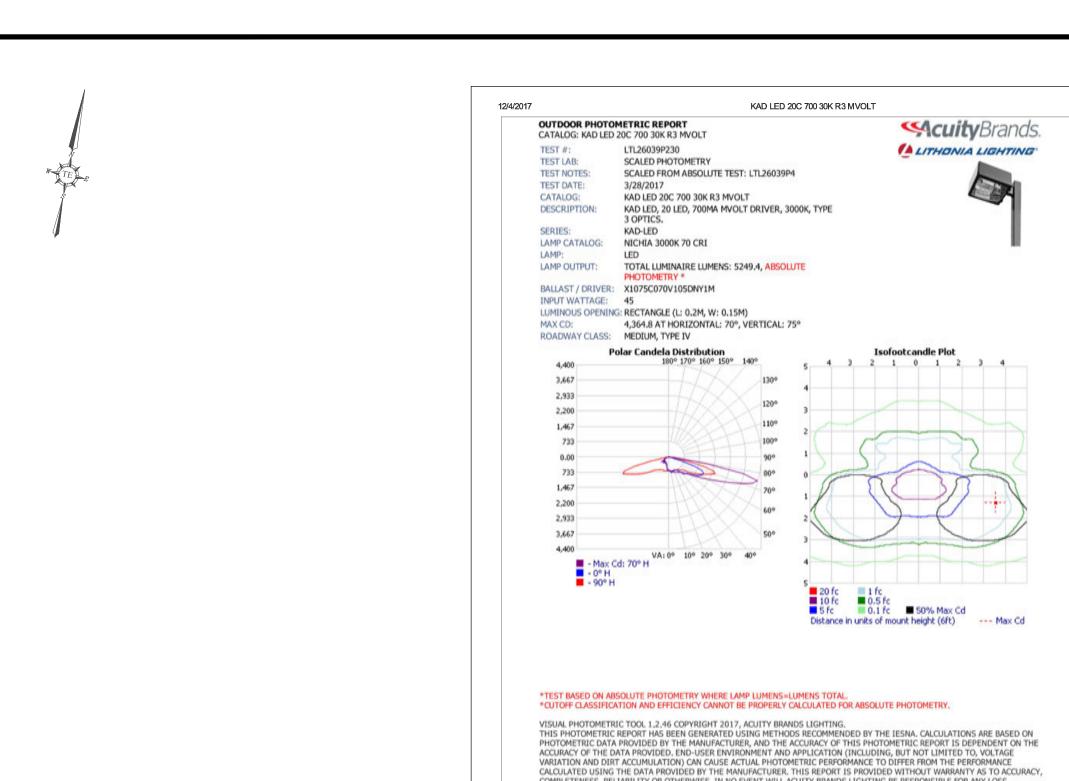

LTL26039P230 VISUAL PHOTOMETRIC TOOL

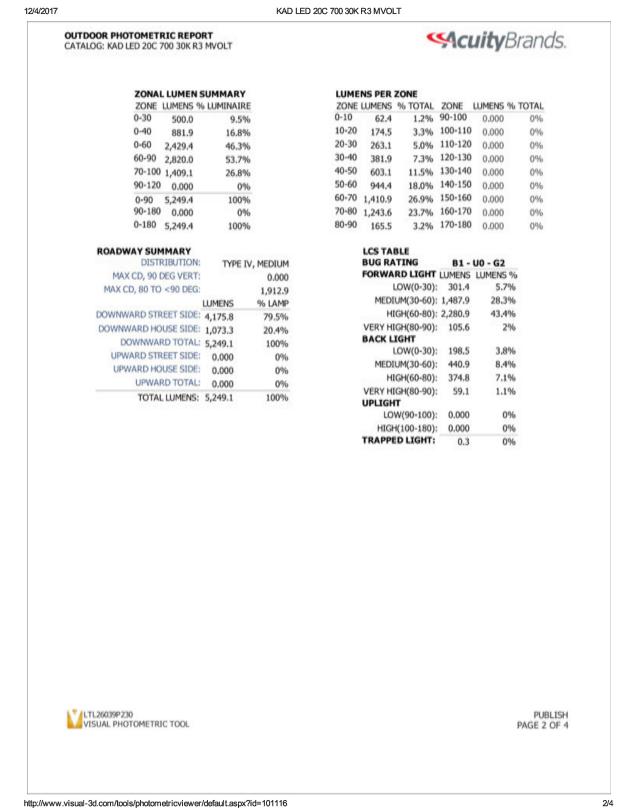


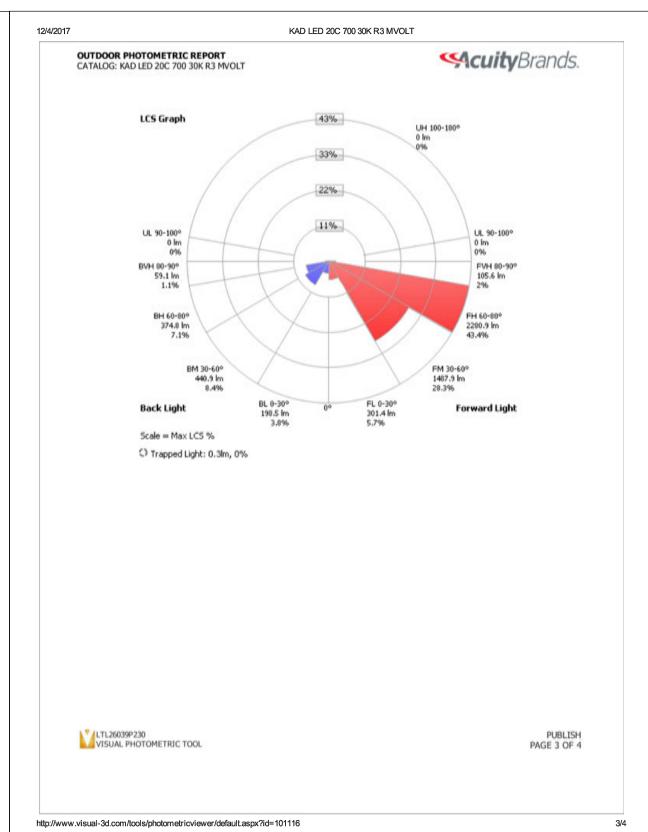

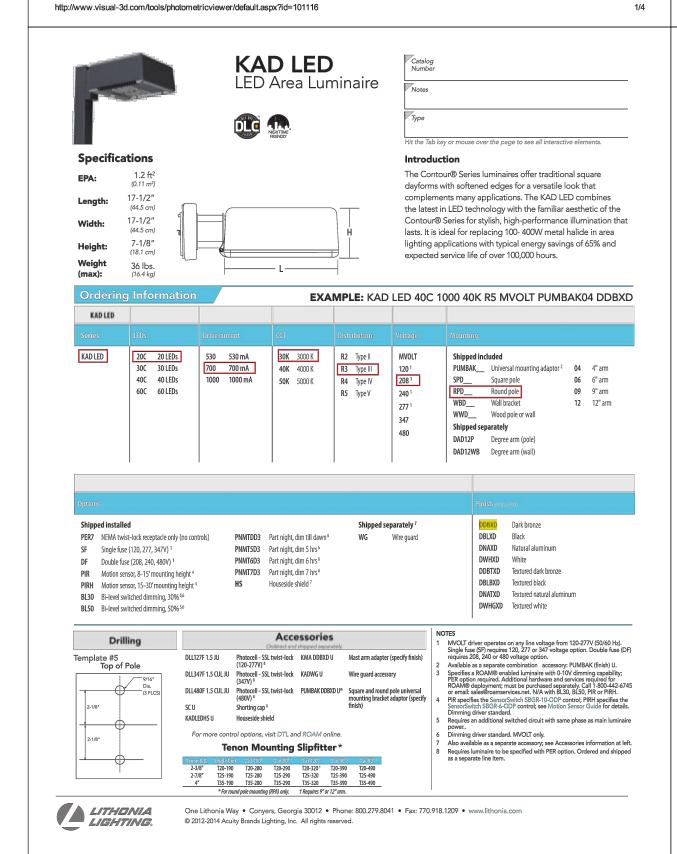

COMPLETENESS, RELIABILITY OR OTHERWISE, IN NO EVENT WILL ACUITY BRANDS LIGHTING BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF THIS REPORT.

PAGE 1 OF 4

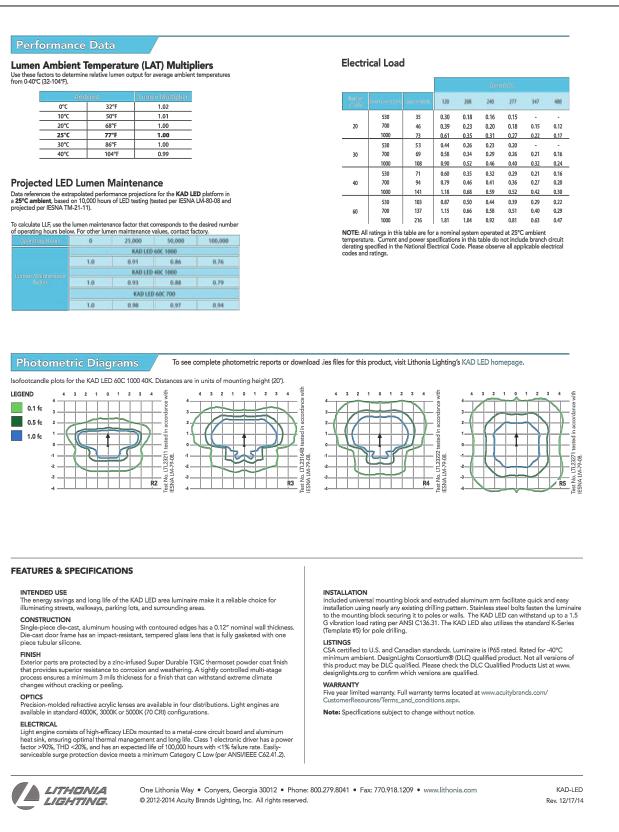


530 mA	Watts 35 W	R2 R3	3,615	В		7														
530 mA	35 W			1	0	1	95	3,846	B 1	0	6 1	101	3,860	B 1	0	1	102			
330 1111	22 11		3,600	1	-	1	95	3,830	1	_	1	101	3,844	1	0	1	101			
		R4 R5	3,605 3,826	2	0	1	95 101	3,835 4,070	3	0	1	101	3,849 4,084	3	0	1	101			
		R2	4,537	1	0	1	95	4,827	1	0	1	101	4,844	1	0	2	101			
700 mA	46.W	R3	4,519	1	0	2	94	4,807	1	0	2	100	4,825	1	0	2	101			
red line		R4	4,524	1	0	2	94	4,813	1	0	2	100	4,830	1	0	2	101			
				-	_	_			_	_	_			_	-	_				
1000 4	7214	R3	6,177	-	-	2	86	6,571	-	_	2	91	6,595	_	-	2	92			
IUUU IIIA	/5 W	R4	6,185	1	0	2	86	6,579	1	0	2	91	6,603	1	0	2	92			
				_	-					-	100		-		_					
£101	E3.W	R3	5,307	1	0	2	98	5,645	1	0	2	105	5,666	1	0	2	105			
530 mA	53 W	84	5,313	1	0	2	98	5,652	1	0	2	105	5,672	1	0	2	105			
		R5	5,639	3	0	1	104	5,999	1	0	1	111	6,020	1	0	1	102			
		R3	6,647	-	_	2	95	7,100	2	0	2	101	7,126	2	0	2	102			
700 mA	69 W	R4	6,655	1	0	2	95	7,080	1	0	2	101	7,105	1	0	2	102			
70		R5	7,063	3	0	2	101	7,514	3	0	2	107	7,541	3	0	2	108			
	108 W		-		-			-		-	_		-			-	-			
1000 mA		R4	8,855	2	0	2	84	9,420	2	0	2	89	9,454	2	0	2	89			
		R5	9,198	3	0	2	89	9,998	4	0	2	94	10,034	4	0	2	95			
530 mA	71 W			-	-	-			_	_	-			_	-	-				
		R4	7,014	1	0	2	102	7,462	1	0	2	108	7,488	1	0	2	109			
		R5	7,444	3	0	2	108	7,919	3	0	2	115	7,947	3	0	2	115			
700 mA	94 W		-	2	-	2		THE REAL PROPERTY.	2		2		-	2		2	-			
		R4	8,712	2	0	2	96	9,268	2	0	2	102	9,301	2	0	2	102			
		R5	9,246	3	0	2	102	9,836	4	0	2	108	9,871	4	0	2	108			
1000 mA	141 W		11,537	-	-	-		_	-	-	-	_	12,322	2	-	-	88			
		R4	11,503	2	0	3	82	12,223	2	0	3	87	12,272	2	0	3	88			
		R5	12,208	4	0	2	87	12,988	4	0	2	93	13,039	4	0	2	93			
530 mA	103 W	R2	10,334	2	0	2	102	10,993	2	0	2	109	11,033	2	0	2	109			
			EDWINDS OF THE PARTY OF		-	-	-	-				-		-		4100000				
		R5	10,935	4	0	2	108	11,633	4	0	2	115	11,675	4	0	2	116			
		R2	12,871	2	0	2	96	13,692	3	0	3	102	13,742	3	0	3	103			
700 mA	137 W	-	12,818	_	-	-		13,636	_	_	3		13,685	_	0	3				
		R5	13,620	4	0	2	102	14,489	4	0	2	102	14,541	4	0	2	109			
	1	R2	16,336	1	0)	76	17,179	1	0	1	80	17,440	1	0	1	81			
1000 mA	216 W	R3 R4	16,268	1	0	3	75	17,307	1	0	4	80	17,368	1	0	4	80			
1000000		R5	17,286	4	0	2	80	18,390	4	0	2	85	18,455	4	0	2	85			
	700 mA 1000 mA 530 mA 700 mA	1000 mA 73 W 530 mA 53 W 700 mA 69 W 1000 mA 108 W 700 mA 94 W 1000 mA 141 W 530 mA 103 W 700 mA 137 W	700 mA	700 mA	700 mA	700 mA	700 mA 73 W R4 R2 R2 R3 R3 R3 R3 R3 R4 R4 R4 R3 R3	700 mA R4	1000 mA	700 mA R6	1000 mA	1000 mA	1000 mA	March Marc	700 mA Mail	Normal N				




NO	DATE	DESCRIPTION	BY	
				ĺ
				'
				MEP GF RI 170
				w



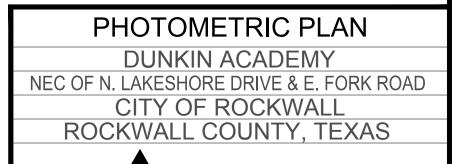



VV.	w. triangle-engr.com O. 1555 inchemoti brive, Suite 200, Alien, 1X 75015										
Plann	ning	Civil Engir	neering	Construction N	Vlanagement						
DESIGN	DRAWN	DATE	SCALE	PROJECT NO.	SHEET NO.						
KP	DS	04/12/17	AS SHOWN	028-16	E6.2						

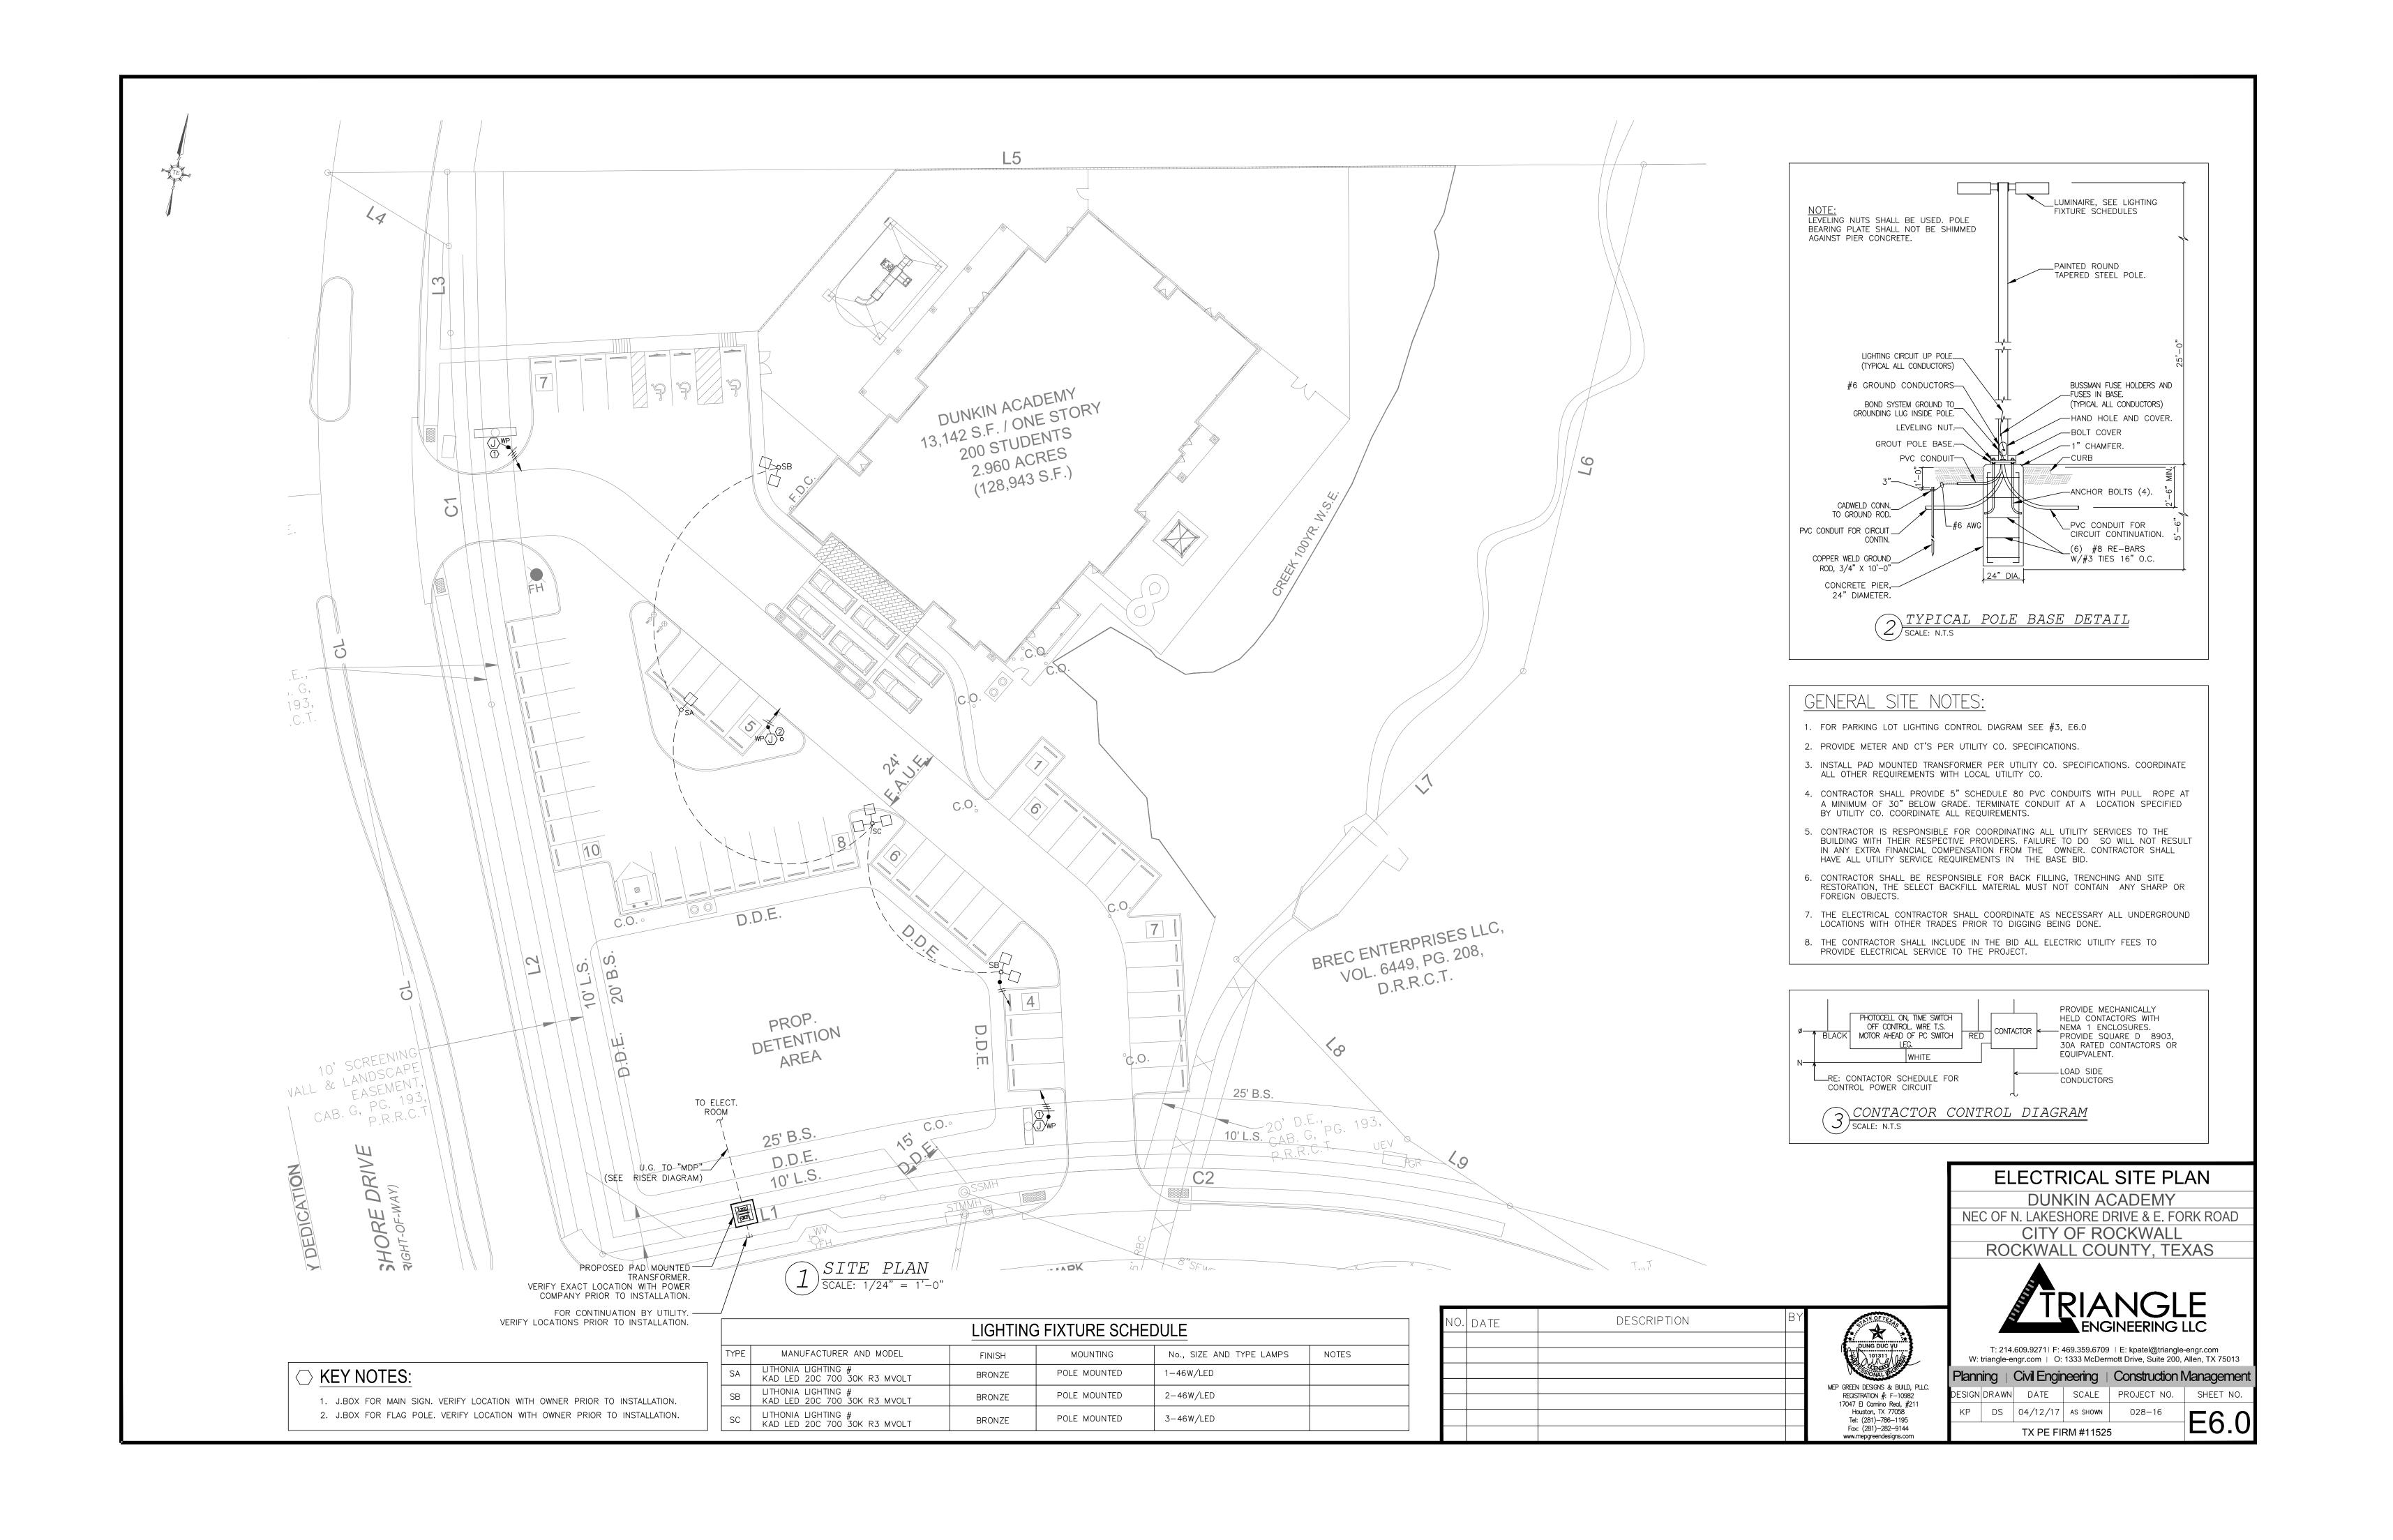

WOOD BRACKETS — SHINGLE SIDING AS SPEC. -PLATE • 0 HORIZONTAL SIDING, AS SPEC. PLATE STONE, AS SPEC. AS SPÉC.

NOTE: LANDSCAPING SHOWN FOR CONCEPTUAL PURPOSES ONLY

3 LEFT ELEVATION (WEST SCALE: 1/8" = 1'-0" (FACING LAKESHORE DRIVE)

FIN. FLR.

(FACING FORK ROAD)





FACADE MATERIAL AREA. FRONT ELEVATION (SOUTH) MASONRY: 799 SF = 69% BRICK: 369 SF = 46% STONE: 430 SF = 54% CEMENTITIOUS SIDING/SHINGLES: 357 SF TOTAL SURFACE AREA: 1,156 SF = 31% REAR ELEVATION (NORTH) MASONRY: 573 SF = 8*0*% CEMENTITIOUS SIDING/SHINGLES: 141 SF TOTAL SURFACE AREA: 714 SF = 2*0*% = 1*00*% LEFT ELEVATION (WEST) MASONRY: 1,069 SF = 85% BRICK: 814 SF = 76% STONE: 255 SF = 24% CEMENTITIOUS SIDING/SHINGLES: 182 SF TOTAL SURFACE AREA: 1,251 SF = 15% = 100% RIGHT ELEVATION (EAST) MASONRY: 982 SF = 74% CEMENTITIOUS SIDING/SHINGLES: 342 SF TOTAL SURFACE AREA: 1,324 SF = 26% = 100%

FACADE MATERIAL SPECS.

BRICK: 'ACME' - CEDAR VALLEY STONE: GRANBURY REGULAR CHOPPED GRAY PAINT FOR HORIZONTAL SIDING: 'SHERWIN WILLIAMS' - SW 6424 PAINT FOR SHINGLE SIDING: 'SHERWIN WILLIAMS' - SW 6366 PAINT FOR TRIM: 'SHERWIN WILLIAMS' - SW 6700 WINDOWS: 'YINYL' - ALMOND COMPOSTION SHINGLE ROOF: WEATHERED WOOD AUNINGS: 'STANDING SEAM METAL' - ALUMINUM GUTTERS: 'ALUMINUM' - PEBBLESTONE CLAY

FACADE NOTES

• ALL MECHANICAL UNITS SHALL BE SCREENED FROM PUBLIC VIEW AS REQUIRED BY THE COMPREHENSIVE ZONING ORDINANCE.

• WHEN PERMITTED, EXPOSED UTILITY BOXES AND CONDUITS SHALL BE PAINTED TO MATCH THE BUILDING.

• ANY/ALL SIGNAGE IS SUBJECT TO FNAL APPROVAL UNDER SEPARATE APPLICATTION/PERMIT BY THE CHIEF BUILDING OFFICIAL OR DESGINEE. • MONUMENT SIGN TO BE CONSTRUCTED OF SAME MATERIALS & COLORS AS BUILDINGS.

SEE LANDSCAPE PLAN FOR MASONRY SCREENING (COLORS & MATERIALS TO MATCH BUILDING).

ARCHITECT

ARCHON CORPORATION ARCHITECTS & PLANNERS 2929 CARLISLE, STE 130 DALLAS, TX 75204 817-975-9767 ATTN: GARY WOOD

OWNER DUNKIN ACADEMY ROCKWALL LLC 320 N TOWN EAST BLVD SUNNYVALE, TX 75182 469-358-5590 ATT: JOHN DUNKIN

A CHILD CARE FACILITY IN ROCKWALL, TEXAS FACADE/ELEY. PLAN

N. LAKESHORE DRIVE & E. FORK ROAD

A 2.960 acre tract of land situated in the A. Hanna Survey, Abstract Number 98, Rockwall County, Texas


REVISIONS BY

DUNKIN ACADEMY
. LAKE SHORE DRIVE
ROCKWALL, TEXAS

Z

ADEMY DUNKIN AROCKWALL,

OOO




Date: 3-28-17

Drawn:

Job: Sheet

ELEVS Sheets








'SW 6700'


SHERWIN WILLIAMS

(C)

ROOF
'WEATHERED WOOD'
COMPOSITION SHINGLE

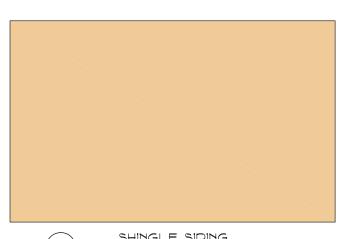

B SHINGLE SIDING
'SW 6366'
SHERWIN WILLIAMS

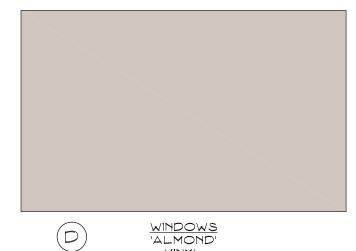


VINYL

AWNINGS
'ALUMINUM'
STANDING SEAM METAL





STONE
GRANBURY REGULAR
CHOPPED GRAY

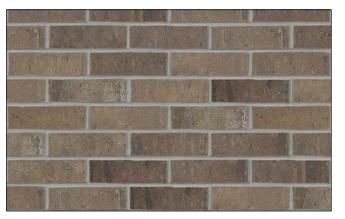

BRICK
CEDAR VALLEY
ACME BRICK

ARCHITECT
ARCHON CORPORATION
ARCHITECTS & PLANNERS
2929 CARLISLE, STE 130

2929 CARLISLE, STE 130 DALLAS, TX 75204 817-975-9767

ATTN: GARY WOOD

OWNER

DUNKIN ACADEMY ROCKWALL LLC 320 N TOWN EAST BLVD SUNNYVALE, TX 75182 469-358-5590 ATT: JOHN DUNKIN

DUNKIN ACADEMY CASE NO.